



# Classic Series Model KS8990HST



Dimensions	007
Width	887 mm
Height	2050 mm
Depth	635 mm
Weight Net	245 kg
Minimum Niche Height	2064 mm
Door Clearance	1470 mm
Door Opening Angle	<105'
Technical Specifications	
Energy Efficiency Class	A+
Energy Usage	442 Kwh
Noise Level	40 dB
Fridge/Riserva Compart. Capacity	3721
Fresco/Wine Cellar Compart. Capacity	-
TriMode Compart. Capacity	140
Features	
Fridge Compartment	
Shelves	3
Door Shelves	3
Fresco Compartment	
Shelves	-
Drawers	1 Low Temp
TriMode Compartment	
Large Drawers	2
Inner Drawers	1+ice tray*
Model Options	
Door Opening Left (3) /Right (6)	V
Ice Maker	<b>✓</b>
Connection data	
Voltage	AC 220-240V 50 H
Power supply cable	Schuko 16 A
Length power supply cable	2,0 mt
Water supply tube (female attachment)	3/4"


### Installation niche features

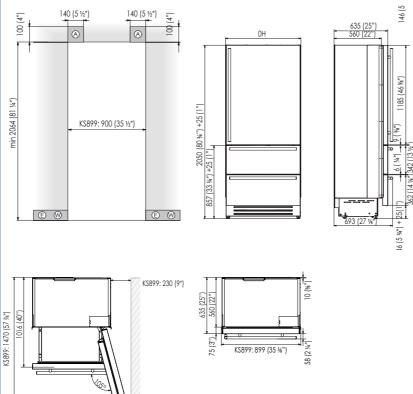


#### Accessories

Description	Code
Stainless steel sides	FKK65T
Joining kit - central (Joining brackets, airflow separation included)	KCCKT
Joining kit - central (models with stainless steel sides) Joining brackets, airflow separation included+anti-condensation kit)	KCCKTX
Extra Length Anti-tipping Kit	B04000900
Anticondensation Kit adhesive 1,6 cm thick	KAC16
Cleaning kit microfiber cloth and 1 magic sponges	RP00KP
Water filter	RP00FA
Transformer for network integration with alternative energy (photovoltaic and geothermal energy, home automation, etc.)	KITNRG899749

#### Flush installation






The Lateral Connection Kit (KCLIT/KCLIH/KCLMT/ KCLMH) is supplied on all models (except in the unit with stainless steel sides) and consists of a connection element (A) and a aluminium frame (B).


### Prominent installation





The Lateral Connection Kit (KCLIT/KCLIH/KCLMT/ KCLMH) is supplied on all models (except in the unit with stainless steel sides) and consists of a connection element (A) and a aluminium frame (B).

## Electrical and Water connection



#### Electrical and Water connection behind the unit

